

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 August 2003 (14.08.2003)

PCT

(10) International Publication Number
WO 03/066933 A1

(51) International Patent Classification⁷: C23C 16/517,
16/452, 16/50

(21) International Application Number: PCT/NL03/00037

(22) International Filing Date: 17 January 2003 (17.01.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1019781 18 January 2002 (18.01.2002) NL

(71) Applicants (for all designated States except US): NED-
ERLANDSE ORGANISATIE VOOR TOEGEPAST-
NATUURWETENSCHAPPELIJK ONDERZOEK
TNO [NL/NL]; Schoemakerstraat 97, NL-2628 VK Delft
(NL). TECHNISCHE UNIVERSITEIT EINDHOVEN
[NL/NL]; Den Dolech 2, NL-5612 AZ Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): LINDEN, Joannes,
Leonard [NL/NL]; Schalmstraat 13, NL-5615 AC Eind-
hoven (NL). ALCOTT, Gregory, Robert [GB/NL]; Jan
Carstensweg 269, NL-5665 TJ Geldrop (NL). HAMERS,
Edward, Aloys, Gérard [NL/NL]; Wijnpeerstraat 79,
NL-5632 MG Tilburg (NL). VAN DE SANDEN, Mauri-
tius, Cornelis, Maria [NL/NL]; Jan van Beverwijkstraat
39, NL-5017 JC Tilburg (NL).

(74) Agent: PRINS, A.W.; Nieuwe Parklaan 97, NL-2587 BN
Den Haag (NL).

(81) Designated States (national): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,

[Continued on next page]

(54) Title: METHOD FOR DEPOSITING INORGANIC/ORGANIC FILMS

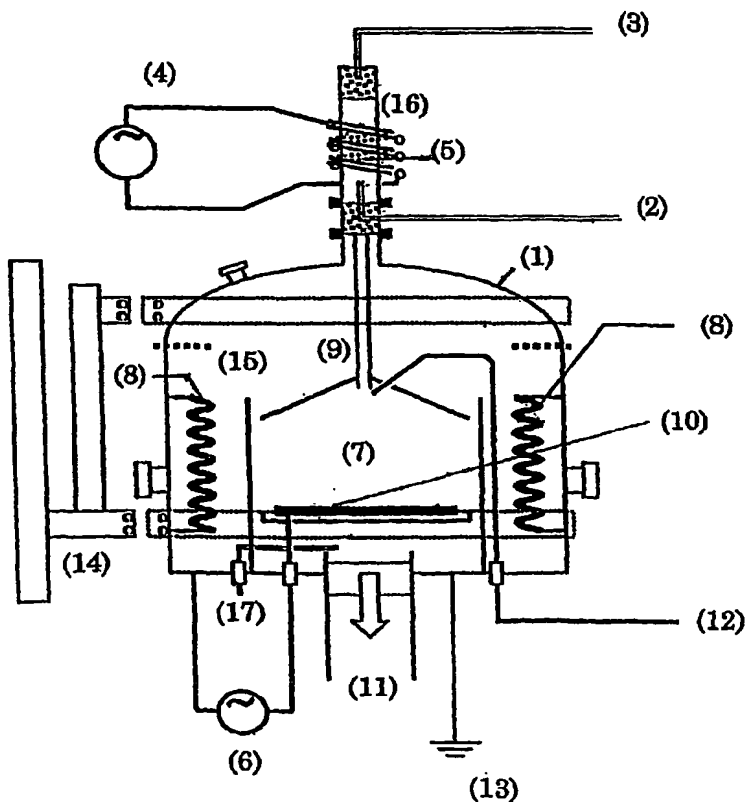

(57) Abstract: The present invention describes a method for applying a hybrid coating to a substrate. A coating according to the invention is formed by an inorganic component and an organic component. As a result, this coating has the hybrid character whereby the advantages of inter alia hardness are combined with the flexibility. The invention also describes a device for the manufacture of a hybrid coating.